


## Quick Reference

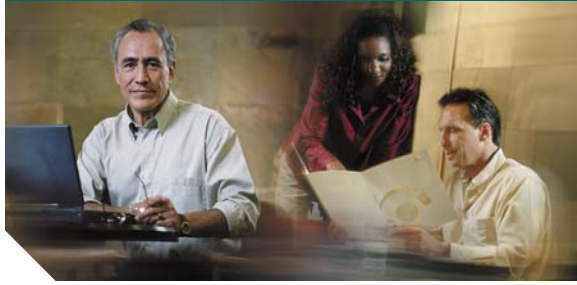

### Quick Reference Card Cisco Unified IP Phones (SCCP) 7905G/7912G, 7906G/7911G, 7940G/7960G, 7941G/7961G Cisco Unified CME

This quick reference card is intended for Cisco Unified IP phone users who are already familiar with their phones. For more detailed information on your phone and its features, see your user guide.

#### Note

Because of differences in phone models and features, not all procedures and soft keys described here apply to all phones.

### Using the Quick Reference

- Complete numbered items in sequence.
- When there are bulleted items, choose only one.
- Bolded terms identify soft keys you press.

### Place a Call

- Lift the handset and dial the number.
- Dial the number and then lift the handset.
- Press the line button for your extension, dial the number, and then lift the handset.
- Press any available button, dial the number, and then lift the handset.
- Press the **New Call** soft key, dial the number, and then lift the handset.
- Press a speed dial button and then lift the handset.
- If you have selected a number from a directory, press the **Dial** soft key, and then lift the handset.

### Answer a Call

- Lift handset.
- If you are using a headset, press **Headset**.
- To use the speakerphone, press **Speaker** or **Answer**.

### End a Call

- Hang up.
- If you are using a headset, press **Headset** or **EndCall**.
- To end a speakerphone call, press **Speaker** or **EndCall**.

### Redial a Number

- Lift handset, press **Redial**.
- To use the speakerphone, press **Redial**.

### Hold a Call

#### Hold

- Press **Hold**.

#### Retrieve

- Press **Resume**.
- To retrieve multiple calls, use the **Navigation** button to select the call, then press **Resume**.

- To retrieve call on multiple lines, press the line button of the line you want to pick up.

### Transfer a Call

#### Blind Transfer

1. Press **Trnsfr**.
2. Dial “transfer to” number.
3. Hang up or press **Trnsfr**.

#### Consultative Transfer

1. Press **Trnsfr**.
2. Dial “transfer to” number.
3. Wait for answer and announce caller.
4. Press **Trnsfr** to leave call. Press **Resume** to reconnect to caller.

#### Cancel

Press **EndCall**.

### Place a Conference Call

1. During a call, press the **more** soft key and then the **Confrn** soft key to open a new line and put the first party on hold.
2. Place a call to another number.
3. When the call connects, press the **Confrn** soft key again to add the new party to the existing call with the first party.

To establish a conference call between two callers to a Cisco Unified IP phone, one active and the other on hold, press the **Confrn** soft key.

To establish a conference call between two callers already present on a Cisco Unified IP phone, using separate line buttons, one active and the other on hold, use the following method:

1. Press the **Confrn** soft key.
2. Press the **Line** button of the call you want to add to the three-party conference.

### End a Conference Call

- Hang up the handset.
- Press the **EndCall** soft key.

### Meet-Me Conference Call

1. Obtain a Meet-Me phone number from your system administrator.
2. Distribute the number to participants.
3. Obtain a dial tone, then press the **more > MeetMe** soft keys.
4. Dial the Meet-Me conference number. Participants can now join the conference by dialing in.

To end a Meet-Me conference, all participants must hang up.

### Ad Hoc Conference Call

#### Start a Conference Call

1. From a connected call, press **Confrn**. (You may need to press the **more** soft key to see **Confrn**.)
2. Enter the participant’s phone number.
3. Wait for the call to connect.
4. Press **Confrn** again to add the participant to your call.
5. Repeat to add additional participants.

#### Remove Participants

1. Highlight the participant’s name.
2. Press **Remove**. You can remove participants only if you initiated the conference.
3. To end your participation in a conference, hang up or press **EndCall**.

Corporate Headquarters  
Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
<http://www.cisco.com>  
Tel: 408 526-4000  
800 553-NETS (6387)  
Fax: 408 526-4100

Cisco, Cisco Systems, and the Cisco Systems logo are registered trademarks or trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries. All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0610R)

© 2006 Cisco Systems, Inc. All rights reserved.

Printed in the USA on recycled paper containing 10%

## Call Forwarding

### All

1. Press CFwdAll.
2. Dial “forward to” number.
3. Press the **Accept** soft key.

### Voice Mail

1. Press CFwdAll.
2. Dial voice mail number.
3. Press EndCall.

### Speed Dial

1. Press CFwdAll.
2. Press Speed Dial button.
3. Press EndCall.

### Cancel

- Hang up.
- Press CFwdAll.

## Speed Dial

### Program Speed Dial

1. Get a dial tone.
2. Press #.
3. Press **Speed-dial** to start.
4. Enter number to speed dial.
5. Press **Speed-dial** to finish.
6. Hang up.

### Call From Speed-Dial

1. Get dial tone.
2. Press **Directories**.
3. Navigate to speed dial.
4. Press **Select** for the desired number.

## Call From Local Directories

1. Press **Directories**.
2. Scroll to directory or press 4 for Local Directories.
3. Enter name for search.
4. Press **Search**.
5. Scroll to number and press **Dial**.

## Call History

### View Call History

1. Press **Directories**.
  - Scroll to history list.
  - Press 1 for Missed Calls.
  - Press 2 for Received Calls.
  - Press 3 for Placed Calls.

### Call from Call History

1. Press **Directories**.
2. Navigate to number.
3. Press **Select**.
4. Press **Dial**.

### Clear Call History

- Press **Clear**. Clears all history.

## .List of Soft Keys

Soft Key	Description
<< or >>	Navigates to edit characters. Use the backspace soft key to erase digits that were entered incorrectly.
Accept	Accepts the current edits. For instance, adding an entry to your personal directory.
Acct	Consult your administrator on the use of this soft key.
Add	Adds an entry to the personal directory.
Alpha	Toggles character input mode from numeric to alphanumeric.
Answer	Answers an incoming call.
BlndXfr	Redirects the call without allowing you to speak to the transfer recipient (known as a blind transfer).
Callback	Notifies callers that the called line is free.
Cancel	Cancels the last selection.
CFwdALL	Forwards all calls.
Clear	Clears directory history.

Soft Key	Description
Confrn	Connects callers to a conference call.
DelAll	Deletes all entries in the personal directory.
Delete	Deletes selected item.
Dial	Dials the displayed number.
Directories	Provides access to phone directories.
DND	Enables and disables the Do-Not-Disturb feature.
Down	Decreases the LCD screen contrast.
Edit	Selects a number and activates the cursor for editing.
EditDial	Selects a number and activates the cursor for editing.
EndCall	Ends the current call.
Exit	Exits from the current selection or screen.
Flash	Provides hookflash functionality for three-way calling and call waiting services provided by the PSTN or Centrex service.
GPickUp	Selectively picks up calls to a phone number that is a member of a pickup group.
Hold	Places an active call on hold. Resumes a held call.
Login	Provides PIN-controlled access to restricted phone features. Contact your system administrator for additional instructions.
Message	Dials the local voice-mail system.
Monitor	Enables the user to switch from the handset to the speaker to listen to a call hands-free.
Monoff	Enables the user to switch from the speaker to the handset and continue talking on the call.
more	Scrolls through additional soft key options (for example, use the <b>more</b> soft key to locate the <b>Number</b> soft key).

Soft Key	Description
Mute	Toggles muting on and off.
NewCall	Opens a new line on the speakerphone to place a call.
Number	Toggles character input mode from alphanumeric to numeric.
Ok	Confirms the selection.
Park	Forwards calls to a location from which the call can be retrieved by anyone in the system.
PickUp	Selectively picks up calls to another extension.
Play	Plays the ring sound sample.
Redial	Redials the last number dialed.
Reorder	Reorder the entries in the Personal Directory.
Restore	Consult your system administrator on the use of this soft key.
Resume	Returns to an active call.
Save	Saves the last change.
Search	Initiates a search in the local directory.
Select	Selects the highlighted option.
Settings	Provides access to phone settings such as display contrast, ring volume, and ring type.
Trnsfer	Transfers selected calls to an alternate number.
Up	Increases the LCD screen contrast.
URL	Enter alphanumeric characters for call forwarding.