



# Installation Note for Catalyst 4000 Family Small Form-Factor Pluggable Modules

---

**Product Numbers:** 30-1299-01(=) Small Form-Factor Pluggable Module

This publication describes how to install the Catalyst 4000 family small form-factor pluggable (SFP) modules. Refer to the *Catalyst 4000 Family Software Configuration Guide—Catalyst 4000 Family, Catalyst 2948G, and Catalyst 2980G Switches* for your switch for configuration information for the supervisor engines and switching modules.

## Contents

This document contains these major sections:

- Safety Overview, page 2
- SFP Modules, page 2
- Standards Compliance Specifications, page 5
- Related Documentation, page 5
- Translated Safety Warnings, page 6
- Obtaining Documentation, page 9
- Obtaining Technical Assistance, page 10



# Safety Overview

Throughout this publication, safety warnings appear in procedures that, if performed incorrectly, may harm you. A warning symbol precedes each warning statement.



Warning

This warning symbol means danger. You are in a situation that could cause bodily injury. Before you work on any equipment, be aware of the hazards involved with electrical circuitry and be familiar with standard practices for preventing accidents. To see translations of the warnings that appear in this publication, refer to the Regulatory Compliance and Safety Information document that accompanied this device.



Warning

Before you install, operate, or service the system, read the *Site Preparation and Safety Guide*. This guide contains important safety information you should know before working with the system.




Warning

Only trained and qualified personnel should be allowed to install or replace this equipment.

## SFP Modules

The WS-X4448-GB-LX Gigabit Ethernet switching module (see Figure 1) has slots for 48 1000BASE-LX SFP modules. The WS-X4448-GB-LX Gigabit Ethernet switching module only supports 1000BASE-LX SFP modules and comes with all 48 1000BASE-LX SFPs pre-installed.

**Figure 1** WS-X4448-GB-LX Gigabit Ethernet Switching Module

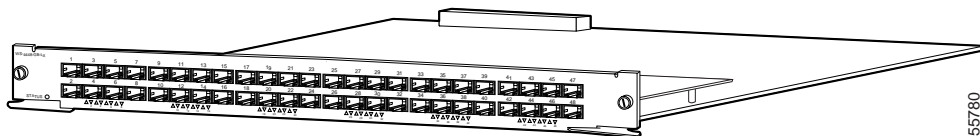


The 1000BASE-LX SFP has LC connectors, as shown in Figure 2.



Caution

Protect your SFP modules by inserting clean dust plugs into the SFP modules after the cables are extracted from them. Be sure to clean the optic surfaces of the fiber cables before you plug them back into the optical bores of another SFP module. Avoid getting dust and other contaminants into the optical bores of your SFP modules: The optics will not work correctly when obstructed with dust.


**Figure 2** SFP Module with LC Connectors

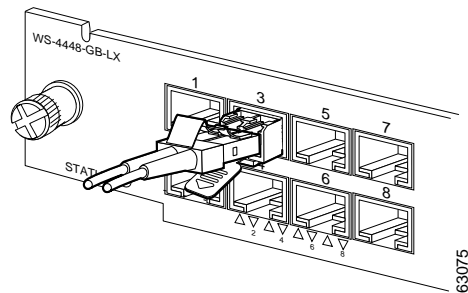

## Installing SFP Modules

The SFP module (see Figure 3) has a bale clasp that you use to secure the SFP module in a switching module port.


**Figure 3** SFP Module

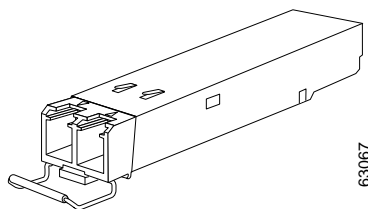

To insert an SFP module into a switching module port, perform the following steps:

- 
- Step 1** Flip the bale clasp up before inserting the SFP module.
  - Step 2** Line up the SFP module with the port and slide it into the port (see Figure 4).

**Figure 4** Inserting an SFP Module into a Switching Module Port

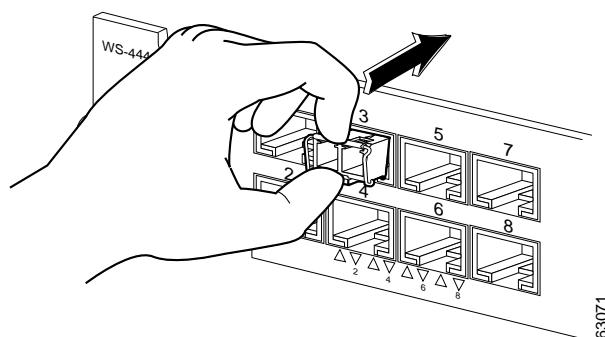


## Removing SFP Modules

To remove an SFP module from a switching module port, perform the following steps:

- Step 1** Open the bale clasp on the SFP module by pressing it down with your index finger as shown in Figure 5.
- Step 2** Grasp the SFP module between your thumb and index finger and carefully remove it from the switching module port as shown in Figure 5.

*Figure 5 Removing an SFP Module with Your Index Finger and Thumb*

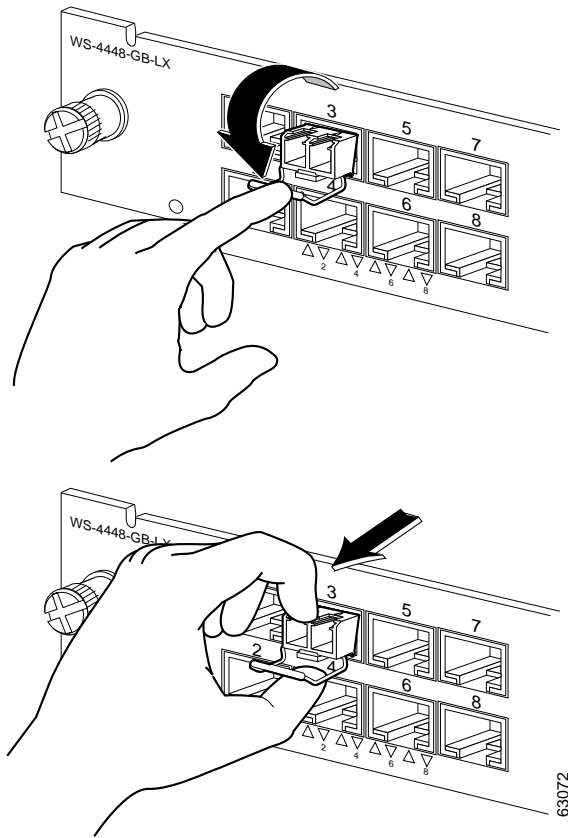

# Standards Compliance Specifications

When installed in a system, the Catalyst 4000 family modules comply with the standards listed in Table 1:

**Table 1** Standards Compliance Specifications

Item	Specification
Compliance	CE <sup>1</sup> Marking
Safety	UL <sup>2</sup> 1950, CSA <sup>3</sup> -C22.2 No. 950, EN <sup>4</sup> 60950, IEC <sup>5</sup> 60950, TS001 <sup>6</sup> , AS/NZS <sup>7</sup> 3260
EMC <sup>8</sup>	FCC <sup>9</sup> Part 15, Class A (CFR <sup>10</sup> 47) (USA), ICES <sup>11</sup> -003 Class A (Canada), EN55022 Class A (Europe), CISPR22 <sup>12</sup> Class A (International), AS/NZS 3548 Class A (Australia), and VCCI <sup>13</sup> Class A (Japan) with UTP <sup>14</sup>

1. CE = European Compliance
2. UL = Underwriters Laboratory
3. CSA = Canadian Standards Association
4. EN = European Norm
5. IEC = International Electrotechnical Commission
6. TS = technical specifications
7. AS/NZS = Australia Standards/New Zealand Standards
8. EMC = electromagnetic compatibility
9. FCC = U.S. Federal Communications Commission
10. CFR = Code of Federal Regulations
11. ICES = Interference-Causing Equipment Standard
12. CISPR = Comite International Special des Perturbation Radioelectriques
13. VCCI = Voluntary Control Council for Information Technology Equipment
14. UTP = unshielded twisted-pair

## Related Documentation

For more detailed installation and configuration information, refer to the following:

- *Site Preparation and Safety Guide*
- *Catalyst 4000 Family Installation Guide*
- *Catalyst 4000 Family Module Installation Guide*
- *Catalyst 4000 Family Supervisor Engines and Switching Modules Installation Note*
- *Regulatory Compliance and Safety Information for the Catalyst 4000 Family Switches*
- *Software Configuration Guide—Catalyst 4000 Family, Catalyst 2948G, and Catalyst 2980G Switches*
- *Command Reference—Catalyst 4000 Family, Catalyst 2948G, and Catalyst 2980G Switches*
- *System Message Guide—Catalyst 6000 Family, Catalyst 5000 Family, Catalyst 4000 Family, Catalyst 2926G Series, Catalyst 2948G, and Catalyst 2980G Switches*
- *Layer 3 Services Software Configuration Guide—Catalyst 5000 Family, Catalyst 4000 Family, Catalyst 2926G Series, Catalyst 2948G, and Catalyst 2980G Switches*

# Translated Safety Warnings

This section translates to multiple languages the warnings used in this installation note.

## Warning Definition



Warning

This warning symbol means *danger*. You are in a situation that could cause bodily injury. Before you work on any equipment, be aware of the hazards involved with electrical circuitry and be familiar with standard practices for preventing accidents. To see translations of the warnings that appear in this publication, refer to the Regulatory Compliance and Safety Information document that accompanied this device.

Waarschuwing

Dit waarschuwingssymbool betekent gevaar. U verkeert in een situatie die lichamelijk letsel kan veroorzaken. Voordat u aan enige apparatuur gaat werken, dient u zich bewust te zijn van de bij elektrische schakelingen betrokken risico's en dient u op de hoogte te zijn van standaard maatregelen om ongelukken te voorkomen. Voor vertalingen van de waarschuwingen die in deze publicatie verschijnen, kunt u het document Regulatory Compliance and Safety Information (Informatie over naleving van veiligheids- en andere voorschriften) raadplegen dat bij dit toestel is ingesloten.

Varoitus

Tämä varoitusmerkki merkitsee vaaraa. Olet tilanteessa, joka voi johtaa ruumiinvammaan. Ennen kuin työskentelet minkään laitteiston parissa, ota selvää sähkökytkentöihin liittyvistä vaaroista ja tavanomaisista onnettomuuksien ehkäisykeinoista. Tässä julkaisussa esiintyvien varoitusten käännökset löydät laitteen mukana olevasta Regulatory Compliance and Safety Information -kirjasesta (määräysten noudattaminen ja tietoa turvallisuudesta).

Attention

Ce symbole d'avertissement indique un danger. Vous vous trouvez dans une situation pouvant causer des blessures ou des dommages corporels. Avant de travailler sur un équipement, soyez conscient des dangers posés par les circuits électriques et familiarisez-vous avec les procédures couramment utilisées pour éviter les accidents. Pour prendre connaissance des traductions d'avertissements figurant dans cette publication, consultez le document Regulatory Compliance and Safety Information (Conformité aux règlements et consignes de sécurité) qui accompagne cet appareil.

Warnung

Dieses Warnsymbol bedeutet Gefahr. Sie befinden sich in einer Situation, die zu einer Körperverletzung führen könnte. Bevor Sie mit der Arbeit an irgendeinem Gerät beginnen, seien Sie sich der mit elektrischen Stromkreisen verbundenen Gefahren und der Standardpraktiken zur Vermeidung von Unfällen bewußt. Übersetzungen der in dieser Veröffentlichung enthaltenen Warnhinweise finden Sie im Dokument Regulatory Compliance and Safety Information (Informationen zu behördlichen Vorschriften und Sicherheit), das zusammen mit diesem Gerät geliefert wurde.

- Avvertenza** Questo simbolo di avvertenza indica un pericolo. La situazione potrebbe causare infortuni alle persone. Prima di lavorare su qualsiasi apparecchiatura, occorre conoscere i pericoli relativi ai circuiti elettrici ed essere al corrente delle pratiche standard per la prevenzione di incidenti. La traduzione delle avvertenze riportate in questa pubblicazione si trova nel documento Regulatory Compliance and Safety Information (Conformità alle norme e informazioni sulla sicurezza) che accompagna questo dispositivo.
- Advarsel** Dette varselsymbolet betyr fare. Du befinner deg i en situasjon som kan føre til personskade. Før du utfører arbeid på utstyr, må du være oppmerksom på de faremomentene som elektriske kretser innebærer, samt gjøre deg kjent med vanlig praksis når det gjelder å unngå ulykker. Hvis du vil se oversettelser av deadvarslene som finnes i denne publikasjonen, kan du se i dokumentet Regulatory Compliance and Safety Information (Overholdelse av forskrifter og sikkerhetsinformasjon) som ble levert med denne enheten.
- Aviso** Este símbolo de aviso indica perigo. Encontra-se numa situação que lhe poderá causar danos físicos. Antes de começar a trabalhar com qualquer equipamento, familiarize-se com os perigos relacionados com circuitos eléctricos, e com quaisquer práticas comuns que possam prevenir possíveis acidentes. Para ver as traduções dos avisos que constam desta publicação, consulte o documento Regulatory Compliance and Safety Information (Informação de Segurança e Disposições Reguladoras) que acompanha este dispositivo.
- ¡Advertencia!** Este símbolo de aviso significa peligro. Existe riesgo para su integridad física. Antes de manipular cualquier equipo, considerar los riesgos que entraña la corriente eléctrica y familiarizarse con los procedimientos estándar de prevención de accidentes. Para ver una traducción de las advertencias que aparecen en esta publicación, consultar el documento titulado Regulatory Compliance and Safety Information (Información sobre seguridad y conformidad con las disposiciones reglamentarias) que se acompaña con este dispositivo.
- Varning!** Denna varningssymbol signalerar fara. Du befinner dig i en situation som kan leda till personskada. Innan du utför arbete på någon utrustning måste du vamedveten om farorna med elkretsar och känna till vanligt förfarande för att förebygga skador. Se förklaringar av de varningar som förekommer i denna publikation i dokumentet Regulatory Compliance and Safety Information (Efterrättelse av föreskrifter och säkerhetsinformation), vilket medföljer denna anordning.

## Site Preparation and Safety Guide Warning



Warning

Before you install, operate, or service the system, read the *Site Preparation and Safety Guide*. This guide contains important safety information you should know before working with the system.

Waarschuwing

Lees de handleiding *Vorbereiding en veiligheid van de locatie Handleiding* voordat u het systeem installeert of gebruikt of voordat u onderhoud aan het systeem uitvoert. Deze handleiding bevat belangrijke beveiligingsvoorschriften waarvan u op de hoogte moet zijn voordat u met het systeem gaat werken.

Varoitus	Ennen kuin asennat järjestelmän tai käytät tai huollat sitä, lue <i>Asennuspaikan valmistelu-jaturvaopas</i> -opasta. Tässä oppaassa on tärkeitä turvallisuustietoja, jotka tulisi tietää ennen järjestelmän käyttämistä.
Attention	Avant d'installer le système, de l'utiliser ou d'assurer son entretien, veuillez lire le <i>Guide de sécurité et de préparation du site</i> . Celui-ci présente des informations importantes relatives à la sécurité, dont vous devriez prendre connaissance.
Warnung	Warnhinweis Bevor Sie das System installieren, in Betrieb setzen oder warten, lesen Sie die <i>Anleitung zur Standortvorbereitung und Sicherheitshinweise</i> . Dieses Handbuch enthält wichtige Informationen zur Sicherheit, mit denen Sie sich vor dem Verwenden des Systems vertraut machen sollten.
Avvertenza	Prima di installare, mettere in funzione o effettuare interventi di manutenzione sul sistema, leggere le informazioni contenute nella documentazione sulla <i>Guida alla sicurezza</i> . Tale guida contiene importanti informazioni che è necessario acquisire prima di iniziare qualsiasi intervento sul sistema.
Advarsel	Før du installerer, tar i bruk eller utfører vedlikehold på systemet, må du lese <i>Veiledning for stedsklargjøring og sikkerhet</i> . Denne håndboken inneholder viktig informasjon om sikkerhet som du bør være kjent med før du begynner å arbeide med systemet.
Aviso	Antes de instalar, funcionar com, ou prestar assistência ao sistema, leia o <i>Guia de Preparação e Segurança do Local</i> . Este guia contém informações de segurança importantes que deve conhecer antes de trabalhar com o sistema.
Advertencia	Antes de instalar, manejar o arreglar el sistema, le aconsejamos que consulte la <i>Guía de prevención y preparación de una instalación</i> . Esta guía contiene importante información para su seguridad que debe saber antes de comenzar a trabajar con el sistema.
Varning!	Innan du installerar, använder eller utför service på systemet ska du läsa <i>Förberedelser och säkerhet Handbok</i> . Denna handbok innehåller viktig säkerhetsinformation som du bör känna till innan du arbetar med systemet.

## Qualified Personnel Warning



### Warning

Only trained and qualified personnel should be allowed to install or replace this equipment

### Waarschuwing

Installatie en reparaties mogen uitsluitend door getraind en bevoegd personeel uitgevoerd worden.

### Varoitus

Ainoastaan koulutettu ja pätevä henkilökunta saa asentaa tai vaihtaa tämän laitteen.

### Avertissement

Tout installation ou remplacement de l'appareil doit être réalisé par du personnel qualifié et compétent.



<b>Achtung</b>	Gerät nur von geschultem, qualifiziertem Personal installieren oder auswechseln lassen.
<b>Avvertenza</b>	Solo personale addestrato e qualificato deve essere autorizzato ad installare o sostituire questo apparecchio.
<b>Advarsel</b>	Kun kvalifisert personell med riktig opplæring bør montere eller bytte ut dette utstyret.
<b>Aviso</b>	Este equipamento deverá ser instalado ou substituído apenas por pessoal devidamente treinado e qualificado.
<b>¡Atención!</b>	Estos equipos deben ser instalados y reemplazados exclusivamente por personal técnico adecuadamente preparado y capacitado.
<b>Varning</b>	<u>Denna utrustning ska endast installeras och bytas ut av utbildad och kvalificerad personal.</u>

## Obtaining Documentation

The following sections explain how to obtain documentation from Cisco Systems.

### World Wide Web

You can access the most current Cisco documentation on the World Wide Web at the following URL:

<http://www.cisco.com>

Translated documentation is available at the following URL:

[http://www.cisco.com/public/countries\\_languages.shtml](http://www.cisco.com/public/countries_languages.shtml)

### Documentation CD-ROM

Cisco documentation and additional literature are available in a Cisco Documentation CD-ROM package, which is shipped with your product. The Documentation CD-ROM is updated monthly and may be more current than printed documentation. The CD-ROM package is available as a single unit or through an annual subscription.

## Ordering Documentation

Cisco documentation is available in the following ways:

- Registered Cisco Direct Customers can order Cisco product documentation from the Networking Products Marketplace:  
[http://www.cisco.com/cgi-bin/order/order\\_root.pl](http://www.cisco.com/cgi-bin/order/order_root.pl)
- Registered Cisco.com users can order the Documentation CD-ROM through the online Subscription Store:  
<http://www.cisco.com/go/subscription>
- Nonregistered Cisco.com users can order documentation through a local account representative by calling Cisco corporate headquarters (California, USA) at 408 526-7208 or, elsewhere in North America, by calling 800 553-NETS (6387).

## Documentation Feedback

If you are reading Cisco product documentation on Cisco.com, you can submit technical comments electronically. Click **Leave Feedback** at the bottom of the Cisco Documentation home page. After you complete the form, print it out and fax it to Cisco at 408 527-0730.

You can e-mail your comments to [bug-doc@cisco.com](mailto:bug-doc@cisco.com).

To submit your comments by mail, use the response card behind the front cover of your document, or write to the following address:

Cisco Systems  
Attn: Document Resource Connection  
170 West Tasman Drive  
San Jose, CA 95134-9883

We appreciate your comments.

## Obtaining Technical Assistance

Cisco provides Cisco.com as a starting point for all technical assistance. Customers and partners can obtain documentation, troubleshooting tips, and sample configurations from online tools by using the Cisco Technical Assistance Center (TAC) Web Site. Cisco.com registered users have complete access to the technical support resources on the Cisco TAC Web Site.

## Cisco.com

Cisco.com is the foundation of a suite of interactive, networked services that provides immediate, open access to Cisco information, networking solutions, services, programs, and resources at any time, from anywhere in the world.

Cisco.com is a highly integrated Internet application and a powerful, easy-to-use tool that provides a broad range of features and services to help you to

- Streamline business processes and improve productivity
- Resolve technical issues with online support

- Download and test software packages
- Order Cisco learning materials and merchandise
- Register for online skill assessment, training, and certification programs

You can self-register on Cisco.com to obtain customized information and service. To access Cisco.com, go to the following URL:

<http://www.cisco.com>

## Technical Assistance Center

The Cisco TAC is available to all customers who need technical assistance with a Cisco product, technology, or solution. Two types of support are available through the Cisco TAC: the Cisco TAC Web Site and the Cisco TAC Escalation Center.

Inquiries to Cisco TAC are categorized according to the urgency of the issue:

- Priority level 4 (P4)—You need information or assistance concerning Cisco product capabilities, product installation, or basic product configuration.
- Priority level 3 (P3)—Your network performance is degraded. Network functionality is noticeably impaired, but most business operations continue.
- Priority level 2 (P2)—Your production network is severely degraded, affecting significant aspects of business operations. No workaround is available.
- Priority level 1 (P1)—Your production network is down, and a critical impact to business operations will occur if service is not restored quickly. No workaround is available.

Which Cisco TAC resource you choose is based on the priority of the problem and the conditions of service contracts, when applicable.

## Cisco TAC Web Site

The Cisco TAC Web Site allows you to resolve P3 and P4 issues yourself, saving both cost and time. The site provides around-the-clock access to online tools, knowledge bases, and software. To access the Cisco TAC Web Site, go to the following URL:

<http://www.cisco.com/tac>

All customers, partners, and resellers who have a valid Cisco services contract have complete access to the technical support resources on the Cisco TAC Web Site. The Cisco TAC Web Site requires a Cisco.com login ID and password. If you have a valid service contract but do not have a login ID or password, go to the following URL to register:

<http://www.cisco.com/register/>

If you cannot resolve your technical issues by using the Cisco TAC Web Site, and you are a Cisco.com registered user, you can open a case online by using the TAC Case Open tool at the following URL:

<http://www.cisco.com/tac/caseopen>

If you have Internet access, it is recommended that you open P3 and P4 cases through the Cisco TAC Web Site.

## Cisco TAC Escalation Center

The Cisco TAC Escalation Center addresses issues that are classified as priority level 1 or priority level 2; these classifications are assigned when severe network degradation significantly impacts business operations. When you contact the TAC Escalation Center with a P1 or P2 problem, a Cisco TAC engineer will automatically open a case.

To obtain a directory of toll-free Cisco TAC telephone numbers for your country, go to the following URL:

<http://www.cisco.com/warp/public/687/Directory/DirTAC.shtml>

Before calling, please check with your network operations center to determine the level of Cisco support services to which your company is entitled; for example, SMARTnet, SMARTnet Onsite, or Network Supported Accounts (NSA). In addition, please have available your service agreement number and your product serial number.

---

This document is to be used in conjunction with the *Catalyst 4000 Family Supervisor Engines and Switching Modules Installation Note*.

CCIP, the Cisco *Powered* Network mark, the Cisco Systems Verified logo, Cisco Unity, Follow Me Browsing, FormShare, Internet Quotient, iQ Breakthrough, iQ Expertise, iQ FastTrack, the iQ Logo, iQ Net Readiness Scorecard, Networking Academy, ScriptShare, SMARTnet, TransPath, and Voice LAN are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn, Discover All That's Possible, The Fastest Way to Increase Your Internet Quotient, and iQuick Study are service marks of Cisco Systems, Inc.; and Aironet, ASIST, BPX, Catalyst, CCDA, CCDP, CCIE, CCNA, CCNP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, the Cisco IOS logo, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Empowering the Internet Generation, Enterprise/Solver, EtherChannel, EtherSwitch, Fast Step, GigaStack, IOS, IP/TV, LightStream, MGX, MICA, the Networkers logo, Network Registrar, *Packet*, PIX, Post-Routing, Pre-Routing, RateMUX, Registrar, SlideCast, StrataView Plus, Stratm, SwitchProbe, TeleRouter, and VCO are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and certain other countries.

All other trademarks mentioned in this document or Web site are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0203R)

Copyright © 2002, Cisco Systems, Inc.  
All rights reserved.